
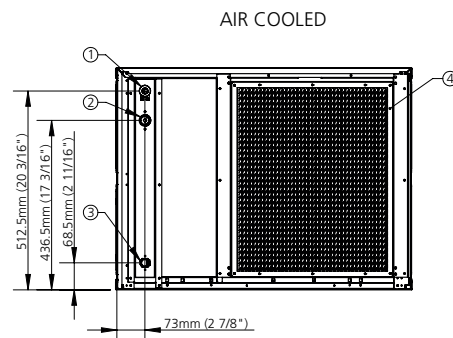



# SVD 203

# SIMAG

Fabbricatore di Ghiaccio 220 kg  
Modulare



Gamma completa: SVD 152 - SVD 203 - SVD 222 - SVD 303 - SVD 503

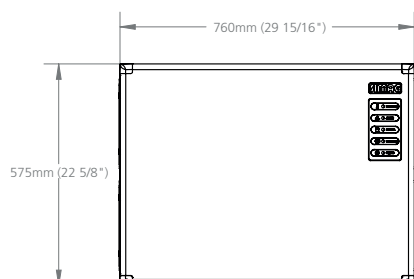


UNIT OF MEASUREMENT: mm (inch)

1. POWER CORD 220V 50Hz;
2. 3/4" GAS-WATER INLET ;
3. 13/16" OD - WATER OUTLET;
4. AIR INLET / AIR FILTER;
5. 3/4" GAS-WATER OUTLET, WATER COOLED UNIT ONLY;
6. 3/4" GAS-WATER INLE , WATER COOLED UNIT ONLY.

AIR FLOW

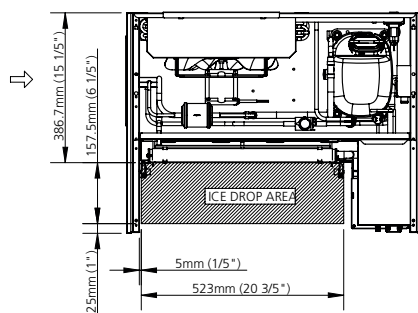

WATER COOLED

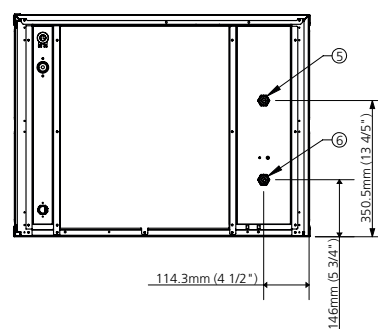

DRENAGGIO PER GRAVITA'

## Limiti di impiego

	Minimo	Massimo
Temperatura aria	10°C	40°C
Temperatura acqua	5°C	35°C
Pressione acqua	1 bar	5 bar
Voltaggio elettrico	-10 %	+10 %

Le caratteristiche tecniche e i disegni sono soggetti a modifiche senza preavviso.

Modello	Voltaggio	Produzione kg/giorno		Potenza assorbita Watt (*)	Refrigerante		Fusibili A	Consumi (**)		
		10°C/10°C	21°C/10°C		Tipo	Carica kg		kWh/100kg	kWh/24h	Acqua l/h
SVDH 203 A	230/50/1	220	210	1000	R452A	0.700	16	15.6	21.9	11.2
SVDH 203 A	230/50/1	240	230	1000	R404A	0.650	16	13.9	22.9	10.6
SVD 203 A	230/50/1	220	210	1000	R452A	0.700	16	15.6	21.9	11.2
SVD 203 A	230/50/1	230	210	1000	R404A	0.650	16	13.9	22.9	10.6
SVDH 203 W	230/50/1	220	210	1000	R452A	0.550	16	9.5	17.1	84.3
SVDH 203 W	230/50/1	230	220	1000	R404A	0.500	16	9.5	18	89.0
SVD 203 W	230/50/1	220	210	1000	R452A	0.550	16	9.5	17.1	84.3
SVD 203 W	230/50/1	230	220	1000	R404A	0.500	16	9.5	18	89.0

(\*) Potenza assorbita: a 43°C di temperatura ambiente

(\*\*) Consumi acqua: a 32°C Aria and 21°C Acqua