
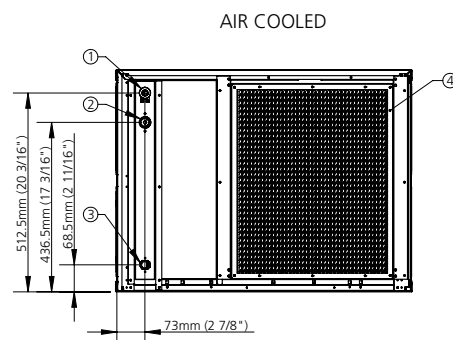



SVD 303

SIMAG

Fabbricatore di Ghiaccio 290 kg
Modulare



Gamma completa: SVD 152 - SVD 203 - SVD 222 - SVD 303 - SVD 503

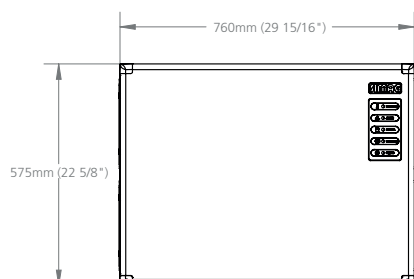


UNIT OF MEASUREMENT: mm (inch)

1. POWER CORD 220V 50Hz;
2. 3/4" GAS-WATER INLET ;
3. 13/16" OD - WATER OUTLET;
4. AIR INLET / AIR FILTER;
5. 3/4" GAS-WATER OUTLET, WATER COOLED UNIT ONLY;
6. 3/4" GAS-WATER INLE , WATER COOLED UNIT ONLY.

AIR FLOW

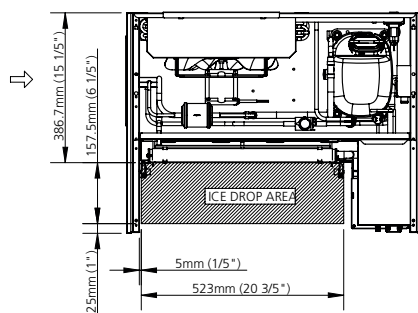

WATER COOLED

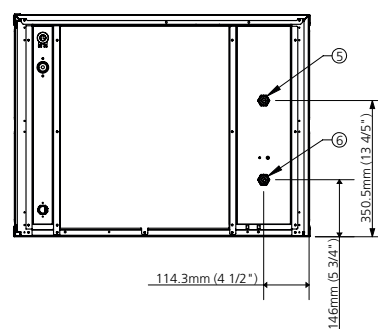

DRENAGGIO PER GRAVITA'

Limiti di impiego

	Minimo	Massimo
Temperatura aria	10°C	40°C
Temperatura acqua	5°C	35°C
Pressione acqua	1 bar	5 bar
Voltaggio elettrico	-10 %	+10 %

Le caratteristiche tecniche e i disegni sono soggetti a modifiche senza preavviso.

Modello	Voltaggio	Produzione kg/giorno		Potenza assorbita Watt (*)	Refrigerante		Fusibili A	Consumi (**)		
		10°C/10°C	21°C/10°C		Tipo	Carica kg		kWh/100kg	kWh/24h	Acqua l/h
SVDH 303 A	230/50/1	290	280	1300	R452A	0.950	16	16.3	34.3	15.6
SVDH 303 A	230/50/1	315	290	1300	R404A	0.900	16	15.9	36.5	15.8
SVD 303 A	230/50/1	290	280	1600	R452A	0.950	16	16.3	34.3	15.6
SVD 303 A	230/50/1	315	290	1600	R404A	0.900	16	15.9	36.5	15.8
SVDH 303 W	230/50/1	290	280	1300	R452A	0.550	16	12.6	30.2	166.4
SVDH 303 W	230/50/1	310	280	1300	R404A	0.550	16	12.3	30.7	166.0
SVD 303 W	230/50/1	290	280	1600	R452A	0.550	16	12.6	30.2	166.4
SVD 303 W	230/50/1	310	280	1600	R404A	0.550	16	12.3	29.6	166.0

(*) Potenza assorbita: a 43°C di temperatura ambiente

(**) Consumi acqua: a 32°C Aria and 21°C Acqua