
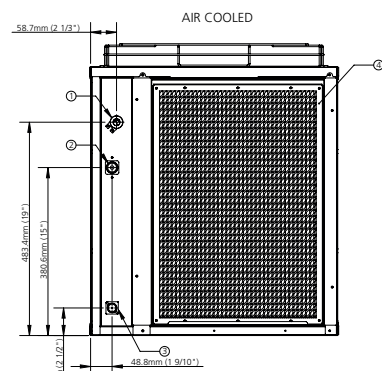
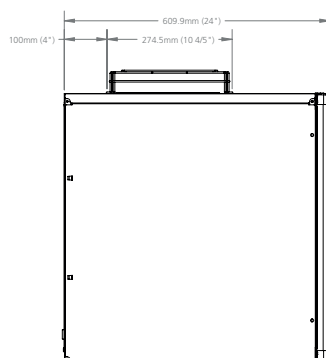


SVD 152




SIMAG

Fabbricatore di Ghiaccio 160 kg
Modulare

Gamma completa: SVD 152 - SVD 203 - SVD 222 - SVD 303 - SVD 503



AIR FLOW
↓



- UNIT OF MEASUREMENT: mm (inch)
1. POWER CORD 220V 50Hz;
 2. 3/4" GAS-WATER INLET ;
 3. 1 3/16" OD - WATER OUTLET;
 4. AIR INLET / AIR FILTER;
 5. 3/4" GAS-WATER OUTLET, WATER COOLED UNIT ONLY;
 6. 3/4" GAS-WATER INLE , WATER COOLED UNIT ONLY.

DRENAGGIO PER GRAVITA'

Limiti di impiego

	Minimo	Massimo
Temperatura aria	10°C	40°C
Temperatura acqua	5°C	35°C
Pressione acqua	1 bar	5 bar
Voltaggio elettrico	-10 %	+10 %

Le caratteristiche tecniche e i disegni sono soggetti a modifiche senza preavviso.

Modello	Voltaggio	Produzione kg/giorno		Potenza assorbita Watt (*)	Refrigerante		Fusibili A	Consumi (**)		
		10°C/10°C	21°C/10°C		Tipo	Carica kg		kWh/100kg	kWh/24h	Acqua l/h
SVD 152 A	230/50/1	160	140	950	R404A	0.460	16	16.8	16.8	7.3
SVD 152 A	230/50/1	160	140	950	R452A	0.550	16	15	15	7.3
SVDH 152 A	230/50/1	160	140	950	R404A	0.460	16	16.8	16.8	7.6
SVDH 152 A	230/50/1	160	140	950	R452A	0.550	16	15	15	7.6
SVD 152 W	230/50/1	150	145	950	R404A	0.330	16	11.9	14.5	109.6
SVD 152 W	230/50/1	140	130	950	R452A	0.350	16	12.3	13.6	109.6
SVDH 152 W	230/50/1	150	145	950	R404A	0.330	16	11.9	14.5	87.8
SVDH 152 W	230/50/1	140	130	950	R452A	0.350	16	12.3	13.6	87.8

(*) Potenza assorbita: a 43°C di temperatura ambiente

(**) Consumi acqua: a 32°C Aria and 21°C Acqua